

Hi all

Some user said that he cannot open the DASH web page, this is because the DASH system IP is different than your linux system IP.

You can open your DASH DOS system to let it get the new IP then you can use the same DASH IP in your Linux system.

Here are the detail steps:

1.Download the DOS package file.

<http://www.tbsdtv.com/download/document/tbs2951/MOIProAMD-DOS-DASH.zip>

2. In this package contain the DASH system and burn tools.

\*.Open UltraISOPortable.exe

\*.File->Open->choose MOIPro-AMD-DASH-DOS-20160408.iso


\*.Bootable->Write Disk Image

\*.Disk Drive ->choose your USB disk then click "Write".

\*.After success burn the system to your USB disk ,copy the 2951 folder to your USB root folder.

3.After write the DOS system to your USB dish plug to your MOIPro-AMD .boot from USB disk.


\* In MOIPro-AMD BIOS setting set to the USB disk

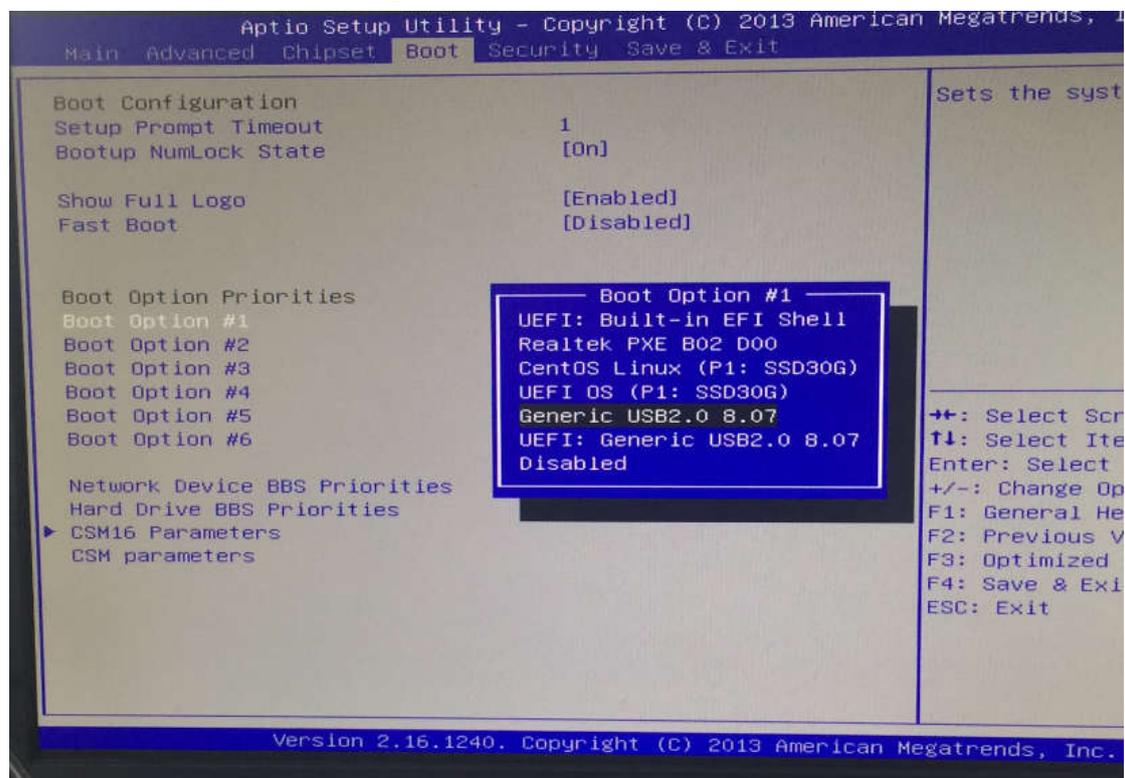

\*Enter the Dos system



\*Go to the 2951 folder

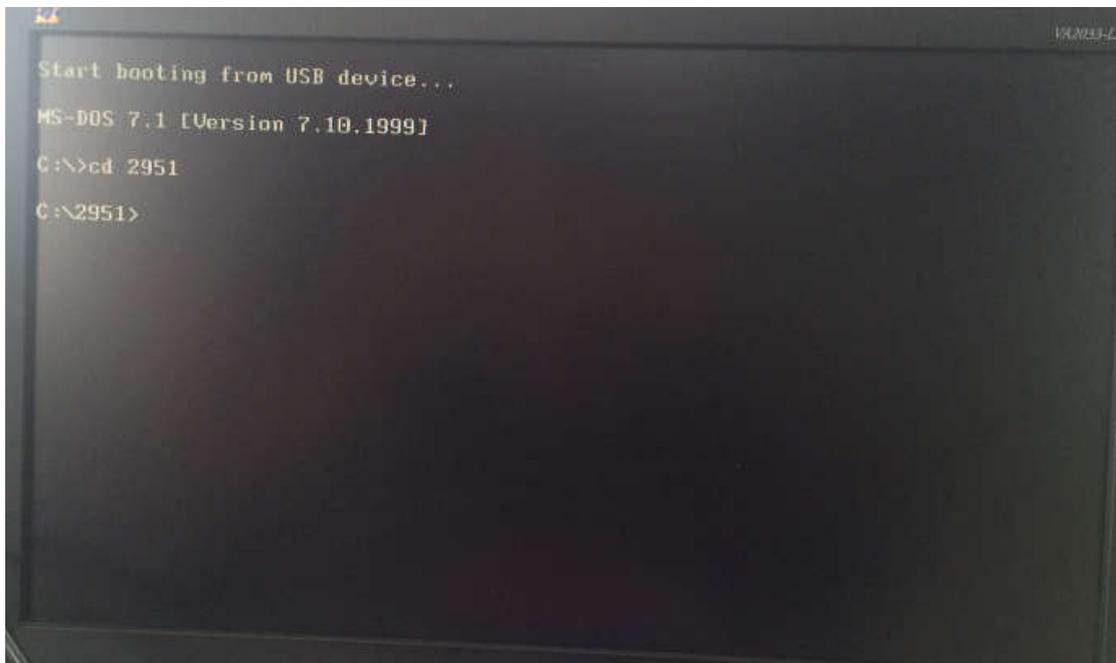

\*enter IP command to get the new IP address



Set DHCPV4 = OFF and you need to set the IP, SUBNET, GATEWAY, DNS value too like this:

```
; user login name
USERNAME = admin
; user password, password length has to be 16 bytes
; default password 'admin'
PASSWORD = 61 64 6D 69 6E 00 00 00 00 00 00 00 00 00 00 00
; operation role
; Administrator : 01
; Operator: 02
; Guest : 03
ROLE = 01
; OOB IP address
IP = 192.168.8.129
; OOB subnet mask
SUBNET = 255.255.255.0
; OOB gateway IP address
GATEWAY = 192.168.8.1
; OOB DNS server ip address
DNS = 192.168.8.1
; ASP console IP address
ASFIP = 192.168.8.3
; ASF function setting
; enable : ON
; disable : OFF
ASFON = ON
; IPV4 DHCP setting
; enable : ON
; disable : OFF
DHCPV4 = OFF
HOSTNAME = hostnameho
; hostname suffix
; enable : ON
; disable : OFF
HN_SUFFIX = ON
```

For DHCP set the DHCPV4 = ON ,like this:

```
; user login name
USERNAME = admin
; user password, password length has to be 16 bytes
; default password 'admin'
PASSWORD = 61 64 6D 69 6E 00 00 00 00 00 00 00 00 00 00 00
; operation role
; Administrator : 01
; Operator: 02
; Guest : 03
ROLE = 01
; OOB IP address
IP = 192.168.8.129
; OOB subnet mask
SUBNET = 255.255.255.0
; OOB gateway IP address
GATEWAY = 192.168.8.1
; OOB DNS server ip address
DNS = 192.168.8.1
; ASP console IP address
ASFIP = 192.168.8.3
; ASF function setting
; enable : ON
; disable : OFF
ASFON = ON
; IPV4 DHCP setting
; enable : ON
; disable : OFF
DHCPIPv4 = ON
HOSTNAME = hostnameho
; hostname suffix
; enable : ON
; disable : OFF
HN_SUFFIX = ON
```

Any more question please send email to our support at [support@tbsdtv.com](mailto:support@tbsdtv.com) .

Best Regards,

TBS Support Team

Email: [support@tbsdtv.com](mailto:support@tbsdtv.com)

Website: [www.tbsdtv.com](http://www.tbsdtv.com)